


Note1: W/O middle bar(6~16P)
With middle bar(18~64P)


RoHS COMPLIANT

REV	ECN NO.	DESCRIPTION	DATE
A		RELEASE	APR. 10'08
B		MODIFY P/N	DEC. 14'10

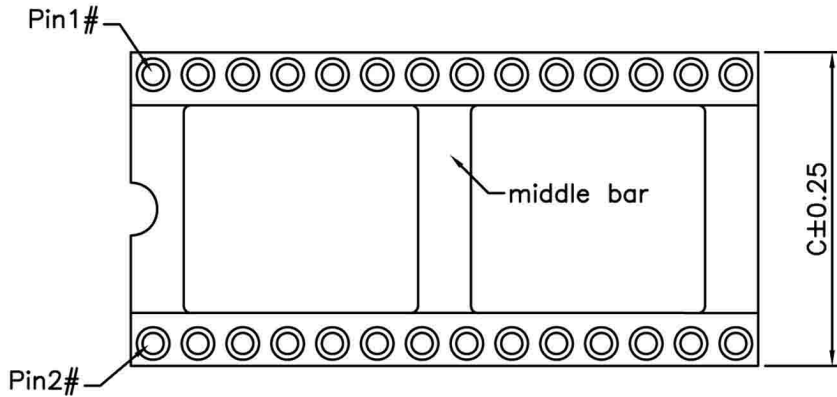

Specifications:
Current rating:1.0A AC/DC
Voltage rating:100V AC/DC
Contact resistance:15m ohm. max.
Insulator resistance:5000M ohm. Min.
Withstanding voltage:1000V AC for one minute
Operating temperature range:-40°C to +105°C


Material and Finish:
Insulator:High Temp. Plastic(PBT UL94V-0)
Standard Color:Black
Contact:Beryllium Copper(Becu) Gold Plated
Sleeve Barrel:Copper Alloy Tin Plated

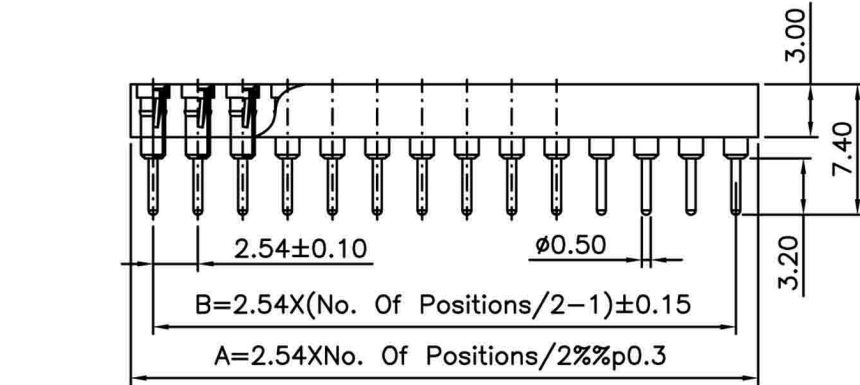

ISM ** T1 - ** - 01

- 03: Space:7.62mm
- 04: Space:10.16mm
- 06: Space:15.24mm
- 09: Space:22.86mm

No. Of Positions

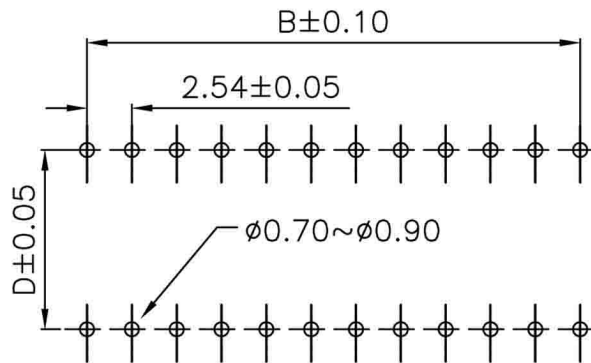

PCB LAYOUT

Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space	Circuits	DIM.A	DIM.B	DIM.C	DIM.D	Space
6	7.62	5.08	10.16	7.62	03	22	27.94	25.40	12.70	10.16	04
8	10.16	7.62	10.16	7.62		24	30.48	27.94	17.78	15.24	
14	17.78	15.24	10.16	7.62		28	35.56	33.02	17.78	15.24	
16	20.32	17.78	10.16	7.62		32	40.64	38.10	17.78	15.24	
18	22.86	20.32	10.16	7.62		40	50.80	48.26	17.78	15.24	
20	25.40	22.86	10.16	7.62		42	53.34	50.80	17.78	15.24	
24	30.48	27.94	10.16	7.62		48	60.96	58.42	17.78	15.24	
28	35.56	33.02	10.16	7.62		64	81.28	78.74	26.00	22.86	

TOLERANCE UNLESS OTHERWISE SPECIFIED



GOLD-TEK ELECTRIC CO., LTD.

	LINEAR	ANGLE
	X ±	X° ±
.X ± 0.20	.X° ±	
.XX ± 0.15	.XX° ±	
.XXX ±	.XXX° ±	

UNITS

MM

SCALE

SIZE

A4

TITLE
2.54MM IC SOCKET
MACHINE PIN

CPART NO.

PART NO.
ISM**T1-**-01

CAD NO. I399
F:\PDF\PH\PH-0391

SHEET
1 OF 1

圖面編號:GTKSD2466-B(1)